

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

NO  
ENGLISH  
Ref 5  
G-44


# OUTPUT CONTROL DEVICE FOR FUEL CELL POWER GENERATING SYSTEM

Patent number: JP4058463  
 Publication date: 1992-02-25  
 Inventor: KOMATSU TADASHI  
 Applicant: FUJI ELECTRIC CO LTD  
 Classification:  
 - International: H01M8/04  
 - european:  
 Application number: JP19900166291 19900625  
 Priority number(s):

## Abstract of JP4058463

**PURPOSE:** To hold the proper utilization factor of reaction gas and stabilize the power generation of a fuel cell without impairing load responsiveness by collating the product of the current and voltage on a characteristic curve and a power command value to determine the target current value, and controlling the feed quantities of fuel gas and reaction air based on the target current value.

**CONSTITUTION:** The feed quantity of reaction gas to a fuel cell I is controlled by a target current estimation section 11 which receives the detected signals of detectors 14, 15 of the output current  $I_f$  and output voltage  $V_f$  of the fuel cell I and outputs the target current estimated value  $I_{fb}$  corresponding to a power command 20 and a reaction gas quantity calculation section 12 which receives the command value of the target current  $I_{fb}$ , calculates the reaction gas quantity corresponding to it, and outputs command signals 14F, 15A to an auxiliary machine controller. A response correcting circuit 13 delays the rising time and trailing time of the square-wave power command 20 to feed it to a controller 8, and the response speed of a power converter 7 is delayed to the response speed of a fuel reformer to control the output.

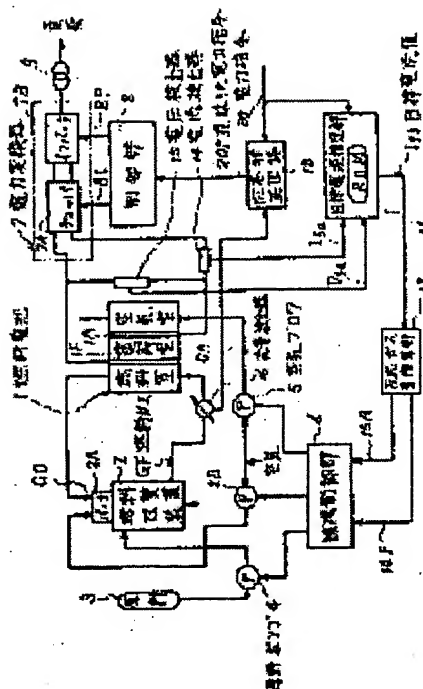

Data supplied from the esp@cenet database - Worldwide

## **OUTPUT CONTROL DEVICE FOR FUEL CELL POWER GENERATING SYSTEM**

Legal status (INPADOC) of JP4058463

No legal data found.